



Drain Coupling

MDC DRAIN COUPLING

- + Coupling for same outside diameters
- + For above and below ground
- + Reliable and durable solution
- + Resistant to 0.6 bar


Drain Coupling MDC – for the connection of all pipe systems with same outside diameters

The Drain Coupling MDC connects all plain ended pipes with same outside diameters and materials.


The Drain Coupling MDC can be used for applications above and below ground as well as inside and outside of buildings.



INSTALLATION

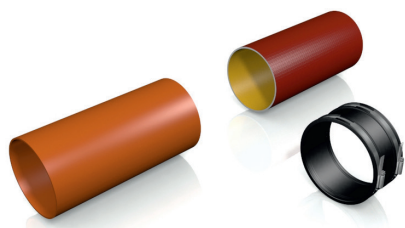

Position plain ended pipes.

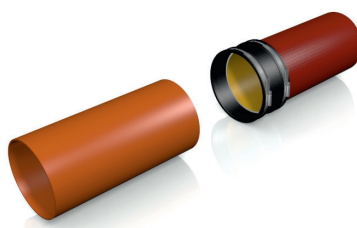


Slide coupling over one plain end.



Center coupling over joint. Tighten clamps.

DESCRIPTION

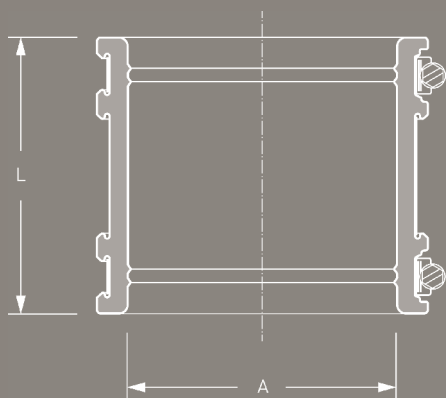

TECHNICAL SPECIFICATION

Drain Coupling MDC for the connection of all plain ended pipe systems with same outside diameters for applications above and below ground as well as inside and outside of buildings.

Pipe 1
Pipe 2
Article Number

DN/Material _____
DN/Material _____
____ Qty ____ Price/Unit ____ Total

Manufacturer:

MISSION RUBBER (UK) LTD., Sheffield, S35 9TG
T +44 (0) 114 257 - 0040

Pressure Tightness:

0.6 bar water / -0.3 bar vacuum

Jetting Resistance:

120 bar

Sealing Material:

EPDM or Nitrile (NBR) rubber with lock in place profile according to BS EN 681-1

Stainless Steel:

AISI 304/1.4301, alternatively AISI 316/1.4404 according to BS EN 10088-2

Temperature Resistance: -40°C to +120°C, temporary max. temperature +160°C

Standard/Approval:

BS EN 295-4



PRODUCT RANGE

DRAIN COUPLING MDC						
Article Number	Reference	A Size Range (mm)	L Length (mm)	resistant to (bar)	Nm	Weight (kg)
76381190	MDC 32	24 - 32	65	0,6	6	0,1
76381195	MDC 40	32 - 40	65	0,6	6	0,1
76381200	MDC 50	42 - 50	65	0,6	6	0,1
76381205	MDC 56	50 - 56	70	0,6	6	0,1
76381947	MDC 65	55 - 65	90	0,6	6	0,2
76381952	MDC 75	65 - 75	90	0,6	6	0,3
76303021	MDC 89	75 - 89	100	0,6	6	0,4
76381970	MDC 95	85 - 95	100	0,6	6	0,4
76381955	MDC 100	85 - 100	100	0,6	6	0,4
76481958	MDC 115	100 - 115	120	0,6	6	0,4
76481959	MDC 122	107 - 122	120	0,6	6	0,4
76481125	MDC 125	110 - 125	110	0,6	6	0,4
76481960	MDC 137	120 - 137	120	0,6	6	0,4
76481961	MDC 150	125 - 150	120	0,6	6	0,5
76481962	MDC 162	137 - 162	120	0,6	6	0,5
76125165	MDC 165	150 - 165	110	0,6	6	0,5
76481964	MDC 175	150 - 175	120	0,6	6	0,6
76481966	MDC 190	165 - 190	150	0,6	6	0,6
76481978	MDC 200	175 - 200	150	0,6	6	0,6
76481980	MDC 212	187 - 212	150	0,6	6	0,6
76481982	MDC 225	200 - 225	150	0,6	6	0,7
76481983	MDC 250	225 - 250	150	0,6	6	0,7
76481984	MDC 275	250 - 275	150	0,6	6	0,8
76481290	MDC 290	265 - 290	150	0,6	6	0,9
76481320	MDC 320	290 - 320	150	0,6	6	0,9

Larger sizes available in the MSC and MLC range.